


Coupling Shroud – Female Joint

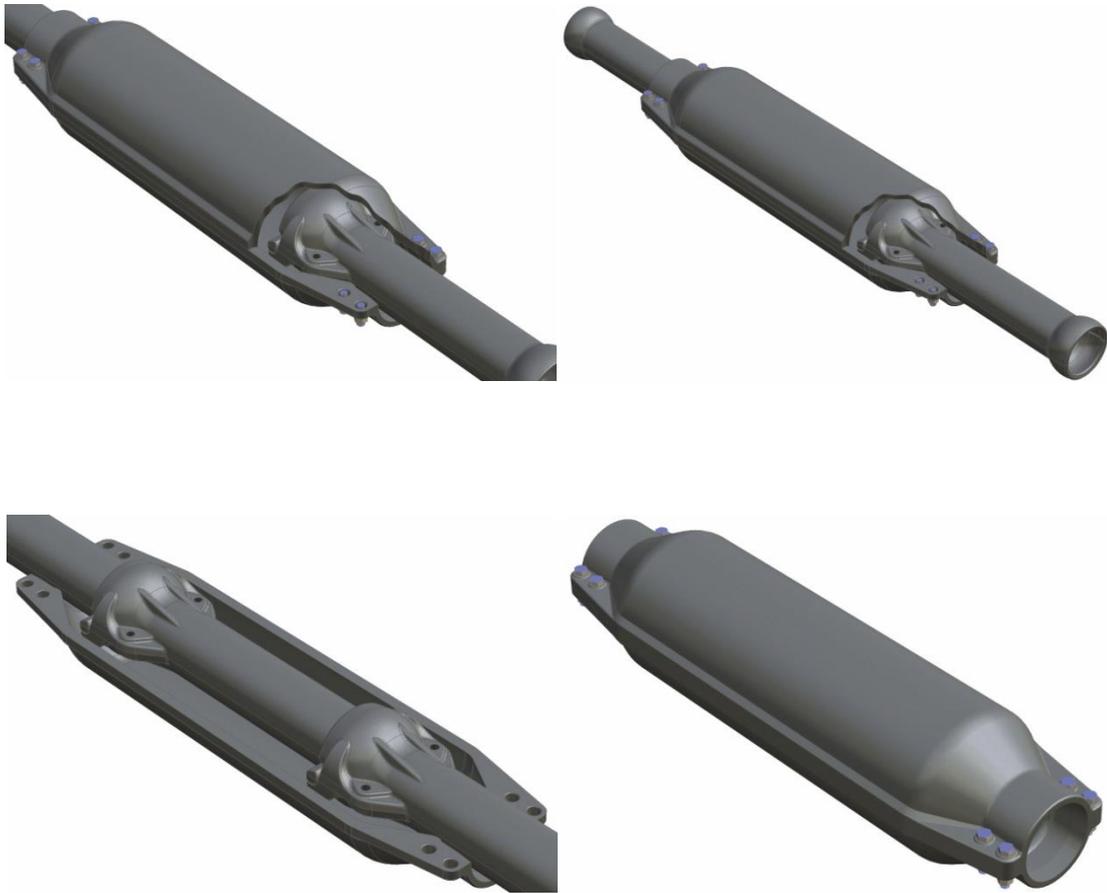

Allows the seamless connection of two converging streams of Protectorshell along the same cable. In the unlikely event of breakage, allows the simple repair of a single section of Protectorshell Articulated pipe.

Specifications

Design Life	25 years
Wall Thickness (min)	9mm
Impact Resistance	≥7.5kJ
Material	Ductile Iron 400/15
Fasteners	G316/A4-70 Stainless Steel
Colour	Iron Grey

Protectorshell SL

C Regata Cutty Sark No 21 4 IZ 15002 La Coruña, Spain
T: +34 8 8124 1115 F: +34 8 8192 4978

www.protectorshell.com

MS Diversified Services Pty Limited

PO Box 150 Maroubra NSW 2035 Australia
1135 Anzac Parade, Matraville, NSW 2036 Australia
T: +61 2 9694 1004 F: +61 2 9314 3526