

PS120, PS127, PS140, PS160, PS170 & PS180 Modular Coupling Shroud



Allows the seamless connection of two converging streams of Protectorshell along the same cable. In the unlikely event of breakage, allows the simple repair of a single section of Protectorshell Articulated pipe.


It also allows to reverse the direction of an installation, and serves as a secure starting point for Protectorshell articulated pipe application.

This Modular coupling shroud accepts our line of Protectorshell PS120, PS127, PS140, PS160, PS170 and PS180 articulated pipe.

Specifications

Full Module overall length	1033mm
Internal Diameter	Ø324mm
Max. Entry diameter	Ø208mm
Nom./Max External diameter	Ø430/Ø450mm
Wall thickness	10mm
Material	Ductile Iron to AS1831 / ISO 1083
Tensile Strength / Elongation	400MPa / 15%
Impact Resistance	≥7.5kJ
Fasteners	M12x50 Bolts and M12 Nyloc Nuts - Material: Stainless Steel G316/A4
Weight of PS120 MCS	111.4kg
Weight of PS127-PS140 MCS	109.7kg
Weight of PS160-PS170 MCS	108kg
Weight of PS180 MCS	103kg

PS180 Modular Coupling Shroud

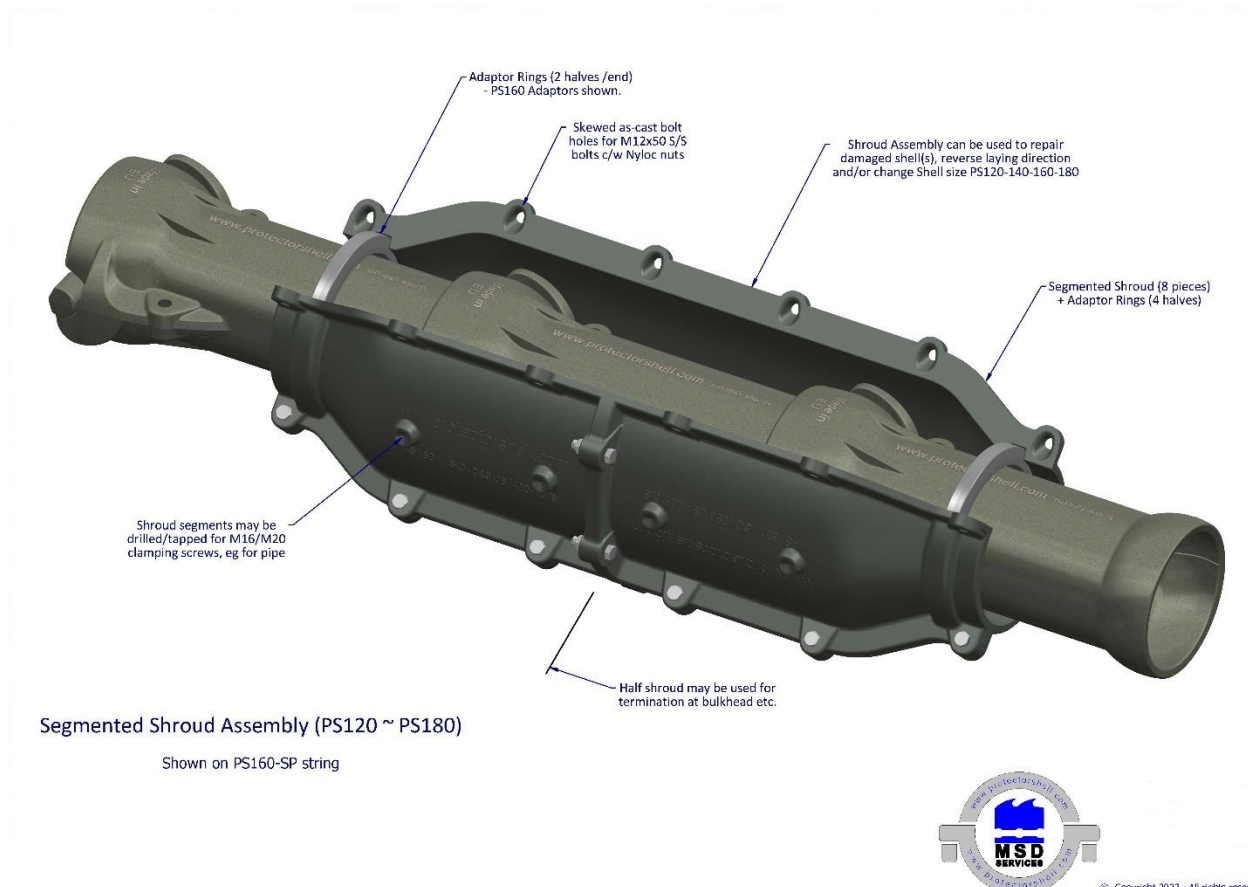

Segmented Shroud Assembly (PS120 ~ PS180)

Shown on PS160-SP string