


Protectorshell J-Tube Seal

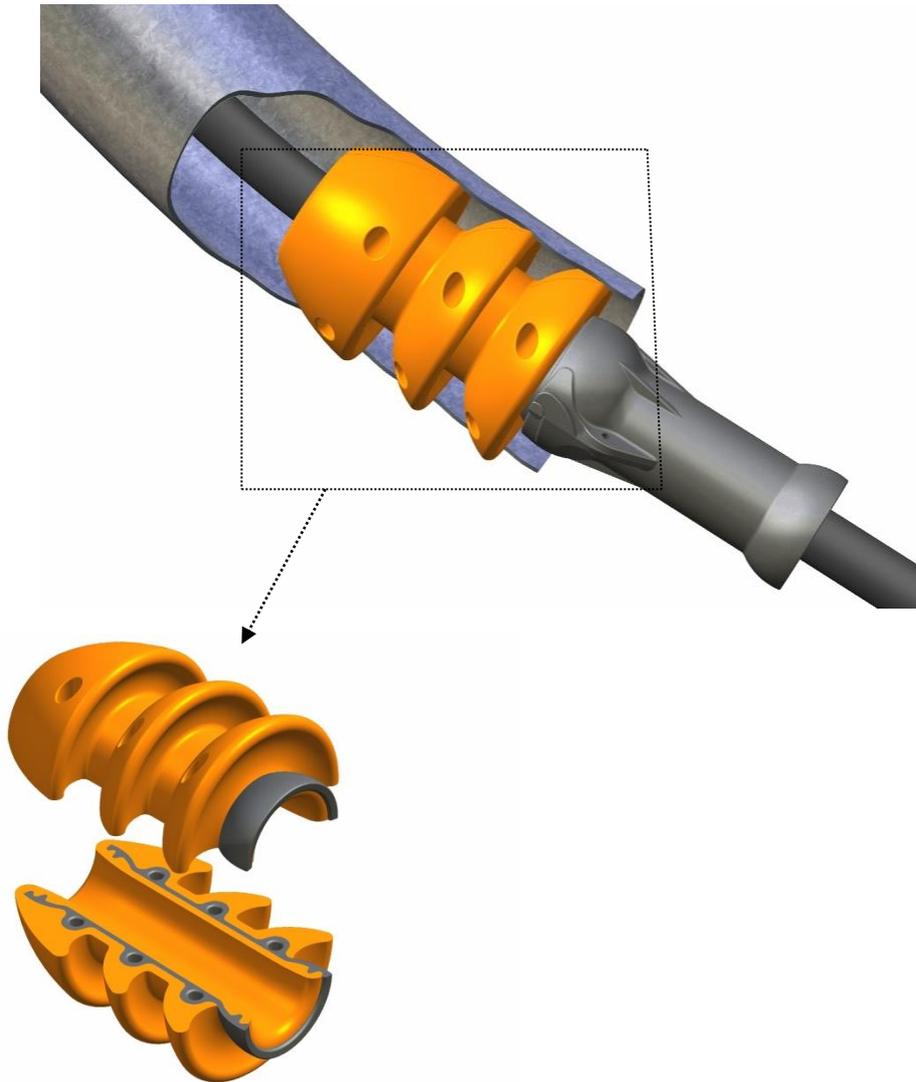

Interface and seal for J-Tubes on offshore structures (Off-shore Wind, Oil and Gas, and other structures).

Specifications

| | |
|------------------------|--------------------------------------|
| Design Life | 25 years |
| Design Loads | 3 ton axial, 1.5 ton bending at 1.0m |
| Cable Size | 20 to 250mm |
| Maximum Outer Diameter | 550mm |
| Weight | Up to 90kg |
| Minimum Bend Radius | 3.5m |
| Length | 400mm |
| Material | Ductile Iron (400/15) and Polyether |
| Fasteners | Super Duplex |
| Colour | Orange |

Protectorshell SL

C Regata Cutty Sark No 21 4 IZ 15002 La Coruña, Spain
T: +34 8 8124 1115 F: +34 8 8192 4978

www.protectorshell.com

MS Diversified Services Pty Limited

PO Box 150 Maroubra NSW 2035 Australia
1135 Anzac Parade, Matraville, NSW 2036 Australia
T: +61 2 9694 1004 F: +61 2 9314 3526