


PS120, PS127, PS140, PS160, PS170 & PS180 Flange adaptor

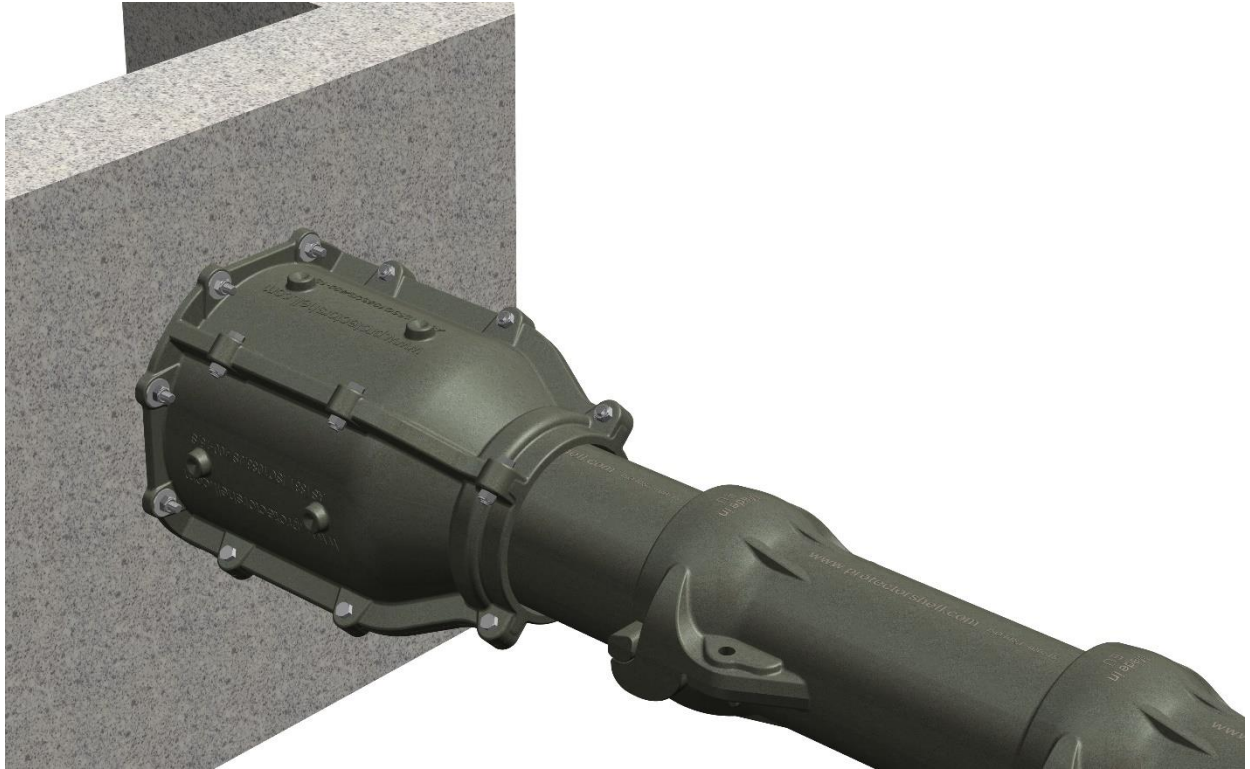

Allows a seamless starting interface for Protectorshell to flanged pipes and concrete structures.

This Flange adaptor accepts our line of Protectorshell PS120, PS127, PS140, PS160, PS170 and PS180 articulated pipe.

Specifications

Module overall length	517mm
Internal Diameter	Ø324mm
Max. Entry diameter	Ø208mm
Nom./Max External diameter	Ø430/Ø450mm
Wall thickness	10mm
Material	Ductile Iron to AS1831 / ISO 1083
Tensile Strength / Elongation	400MPa / 15%
Impact Resistance	≥7.5kJ
Weight	51.6kg
Fasteners	M12x50 Bolts and M12 Nyloc Nuts - Material: Stainless Steel G316/A4
Weight of PS120 Flange adaptor	60kg
Weight of PS127 - PS140 Flange adaptor	58.28kg
Weight of PS160 Flange adaptor	56.52kg
Weight to PS170 – PS180 Flange adaptor	51.60kg

Protectorshell SL

C Regata Cutty Sark No 21 4 IZ 15002 La Coruña, Spain
T: +34 8 8124 1115 F: +34 8 8192 4978

www.protectorshell.com

MS Diversified Services Pty Limited

PO Box 150 Maroubra NSW 2035 Australia
1135 Anzac Parade, Matraville, NSW 2036 Australia
T: +61 2 9694 1004 F: +61 2 9314 3526